


Perekat sambungan ubin epoksi kelin adalah produk baru yang ditingkatkan setelah nat ubin epoksi ditularkan melalui air berwarna-warni, tidak hanya mempertahankan tekstur nat ubin epoksi ditularkan melalui air berwarna-warni, meningkatkan kinerja produk, tetapi juga membuat konstruksi lebih mudah dan lebih nyaman. Tekstur lembut, sangat menunjukkan gaya dekoratif mewah sederhana Anda. Varietas warna, buat tempat dekorasi Anda berkilau. Kursus subbase resin epoksi ramah lingkungan membuat produk Anda lebih tahan air, tahan aus, tahan jamur dan tahan lembab. Juga, itu secerah porselen setelah memberi petunjuk tanpa menguning atau menghilangkan warna. Selain itu, permukaan sambungan terlihat sangat pas dengan ubin keramik, seperti halnya alam itu sendiri. Produk bisa lebih baik digunakan pada sambungan ubin keramik, batu, kaca, ubin mosaik di dinding atau tepung di kamar mandi, dapur, kamar tidur dan sebagainya. Produk penelitian dan pengembangan bersama Australia untuk membuat kinerja yang lebih baik, dan melalui panduan kontrol kualitas strategis Akademi Ilmu Pengetahuan China, untuk membuat kualitas produk stabil. Pilih Kelin- [Pemasok nat ubin epoksi Cina](#), memberi Anda rumah yang sehat dan aman.



Varietas warna untuk pilihan Anda. Juga berikan warna khusus.

- Gray 1#
- Gray 2#
- Gray 3#
- Gray 4#
- Gray 5#
- Gray 6#
- Gray 7#
- Gray 8#
- Gray 9#
- Cement Gray
- Dull Gray
- Silver Gray
- Metal Gray
- Luxury Silver
- Glacier White
- Calaeatta
- Pearl Gold
- Slate Gray
- Terra Brown
- Greyish Green
- Yellow Gray
- Soft Khaki
- Yellowish Brown
- Olive Brown
- Brownness
- Dark Brown
- Reddish Brown
- Rock Bslack

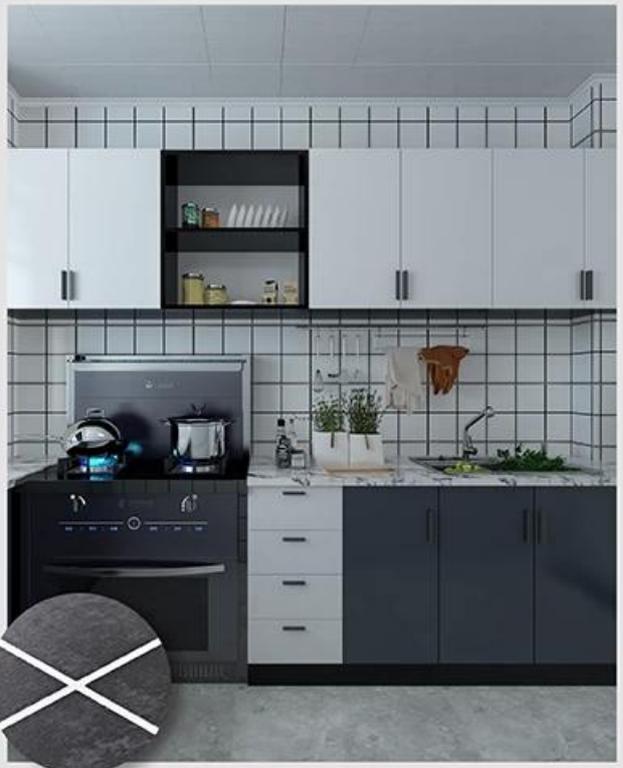

Memberikan Solusi Celah Ruang Utuh



Proses Konstruksi Singkat



Clean the tiles and keep it dry



Polish with tile wax except the glazed tile




Open & Watch, both sides can extruded meanwhile



Screw on the nozzle, put on the grout gun



Inclined cut the top of the nozzle in 45°



Squeeze out 60-80cm long grout in the forepart



Evenly squeeze out the tile agent along the gap



Press the grout with professional glue-press tools



Don't touch in 4-5 hours and remove excess grout then.



Keep the tiles dry in 24 hours

Alat Penekan Sendi Profesional



Two Component Caulking Gun



Cutter Knife



Pointing trowel



Brush



Forming Stick



Perching Knife



Masking Tape



Stainless Steel Ball



Cleaning Awl

Keuntungan Perusahaan



Tinjauan Pabrik



Garis Mesin Krim



Mesin Uji



Jalur Produksi Batching



Pendinginan Filing



Mengisi Garis Mesin



Mesin berlapis film



Stok Material Nyata



persediaan

Sertifikasi

