

Perekat epoksi yang ditularkan melalui air kelin adalah produk lingkungan kelas atas. Dan kami adalah pemasok perekat ubin dengan kekuatan komprehensif yang kuat. Tekstur matte, memberi Anda gaya dekoratif mewah yang sederhana, dan permukaan sambungan terlihat sangat cocok dengan ubin keramik. Varietas warna, biarkan tempat dekorasi Anda berkilau. Kursus subbase resin epoksi yang terbawa air membuat produk benar-benar ramah lingkungan. Pasir alami yang dikalsinasi pada suhu tinggi membuat warnanya lebih alami dan indah serta tidak pernah pudar.

produk dari [nat ubin marmer Cina m pabrikan](#) Lebih baik digunakan pada sambungan ubin keramik, batu, kaca, ubin mosaik di dinding atau tepung di kamar mandi, dapur, kamar tidur dan sebagainya. Ini adalah produk pilihan dalam dekorasi keluarga, menambahkan ion oksigen negatif untuk memurnikan udara. Produk penelitian dan pengembangan bersama Australia untuk membuat kinerja yang lebih baik, dan melalui bimbingan kontrol kualitas strategis Akademi Ilmu Pengetahuan China, untuk membuat kualitas produk stabil. Selamat datang untuk menghubungi kami- [agen jahit cina pemasok](#) kerja sama.



Varietas warna untuk pilihan Anda. Juga menyediakan warna kustom.

- Gray 1#
- Gray 2#
- Gray 3#
- Gray 4#
- Gray 5#
- Gray 6#
- Gray 7#
- Gray 8#
- Gray 9#
- Cement Gray
- Dull Gray
- Silver Gray
- Metal Gray
- Luxury Silver
- Glacier White
- Calaeatta
- Pearl Gold
- Slate Gray
- Terra Brown
- Greyish Green
- Yellow Gray
- Soft Khaki
- Yellowish Brown
- Olive Brown
- Brownness
- Dark Brown
- Reddish Brown
- Rock Bslack



Berikan Solusi Kesenjangan Seluruh Kamar



Proses Konstruksi Singkat



01
Clean the tiles and keep it dry



02
Polish with tile wax except the glazed tile



03
Open & Watch, both sides can extruded meanwhile



04
Screw on the nozzle, put on the grout gun



05
Inclined cut the top of the nozzle in 45°



06
Squeeze out 60-80cm long grout in the forepart



07
Evenly squeeze out the tile agent along the gap



08
Press the grout with professional glue-press tools



09
Don't touch in 4-5 hours and remove excess grout then.



10
Keep the tiles dry in 24 hours

Alat Press Bersama Profesional



Cutter Knife



Pointing trowel



Brush



Rainbow Scraper



Stirring Knife




The sponge



Scouring Pad

Keuntungan Perusahaan

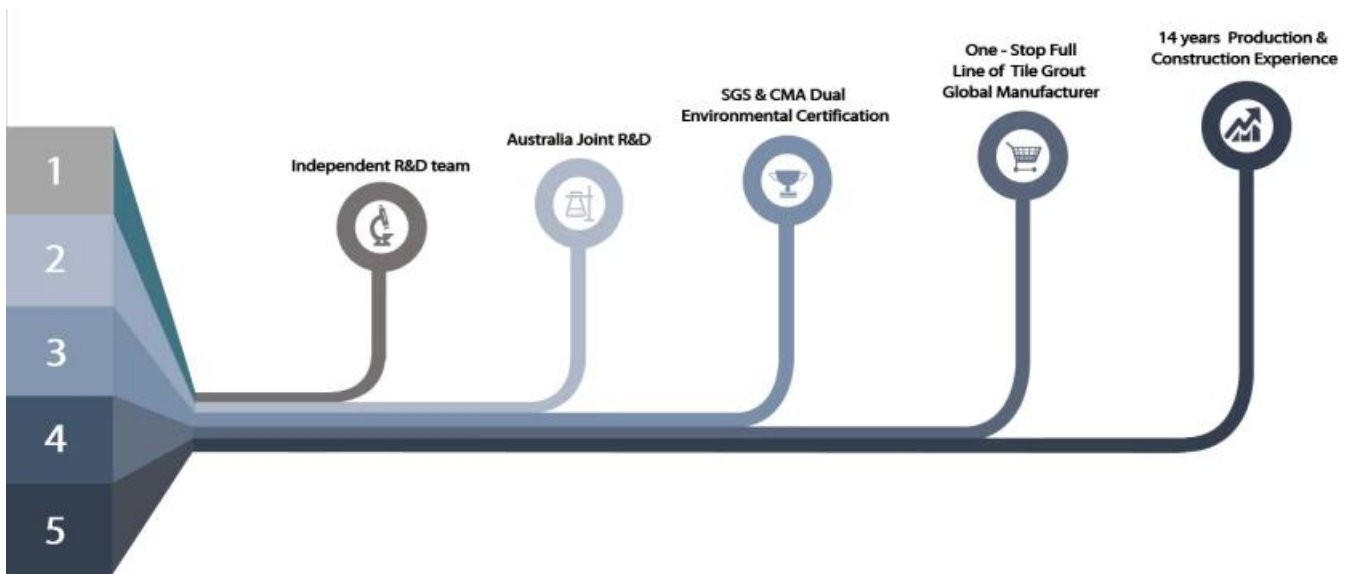

Ikhtisar Pabrik



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Raw Material Stock



Stock

Sertifikasi

